



**CUSTOM SIZES AVAILABLE!**

Stockton Custom Fabrication

877-786-2587

custom@StocktonProducts.com



**PRODUCTS™**

## M-S: M Scribed

- Custom Sizes Available, Contact Customer Service For Details
- Available in Aluminum (A), Copper (C), Galvanized Steel (GS), Bonderized (BN), Galvalume® (GVM), Stainless Steel (SS) or Zinc (Z)

A versatile control joint used primarily to relieve cracking. Provides a decorative reveal.

### Most Common Sizes

**X Sizes:** 3/4" or 7/8"

**Y Sizes:** 1/2" or 5/8"

**Length:** 120"

### Materials And Finishes:

Details: [stpro.us/MET](http://stpro.us/MET)

Aluminum (A), Copper (C), Galvanized Steel (GS), Bonderized (BN), Galvalume® (GVM), Stainless Steel (SS) or Zinc (Z)

### ASTM Codes:

Details: [stpro.us/ASTM](http://stpro.us/ASTM)

All Accessories are fabricated from prime galvanized steel C90 zinc coating by the hot dipped method, conforming to steel and coating specification ASTM A-653/A-653M or zinc alloy meeting ASTM B-69. Stainless Steel A480/A480M A580M (Stainless Steel) For installation and placement instructions refer to ASTM C1063, C841 and C926.

### Most Common Part Numbers:

**M S012 012** M-S: X=1/2, Y=1/2, GS, 10'



**M S034 012** M-S: X=3/4, Y=1/2, GS, 10'

**M S034 012** M-S: X=3/4, Y=1/2, GS, 10'

**M S034 058** M-S: X=3/4, Y=5/8, GS, 10'

**M S078 012** M-S: X=7/8, Y=1/2, GS, 10'

**M S078 058** M-S: X=7/8, Y=5/8, GS, 10'

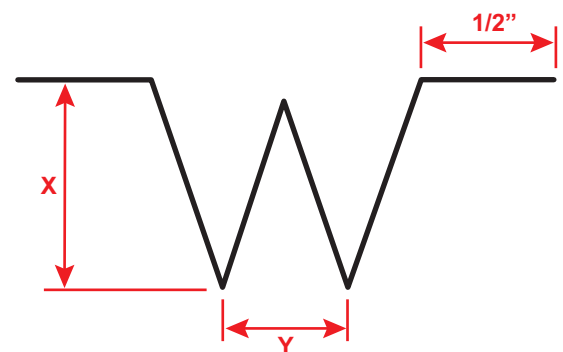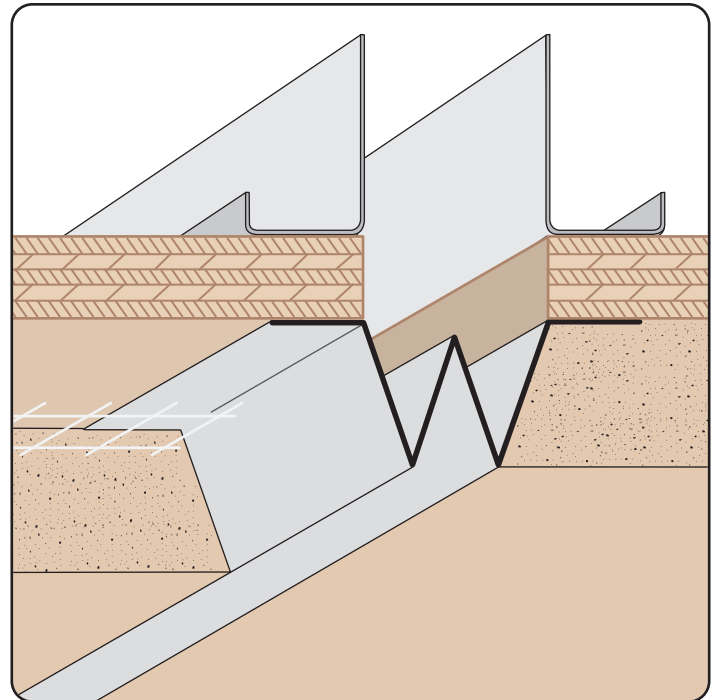

<b>QUOTE</b>	Company: _____	QTY: _____	PO Number: _____
	Name: _____	Material/Gauge: _____	Job/Project: _____
	Address: _____	X Size: _____	Notes: _____
	City: _____	Y Size: _____	_____
	State/ZIP: _____	Length: _____	_____
	Phone: _____		_____
	eMail: _____		_____

**877-786-2587 • StocktonProducts.com**

