



PNDS: Plastic Nose Depth Screed

- Available In 3/4" and 1" Grounds
- Available in Galvanized or Stainless Steel

Assists in controlling stucco or concrete depth and can act as a control joint inhibiting cracking. Also used in fireproofing applications. Recommended for use with acrylic finishes.

Per Carton

Total Feet: 250' Pieces: 25 Length: 10'

Materials:

Class 1 G60 Galvanized (17.5 Gauge Wire), Stainless Steel (17.5 Gauge Wire) 316L Stainless 18% Chromium

ASTM Codes:


Details: stpro.us/ASTM

1063, 924, 641/A641 M-03, 653, 841, 580, Galvanized - C1063 & A924, Federal Spec QQ-S-775-D, 200 IBC, 2007 CBC

Most Common Part Numbers:

PNDS3410 PNDS: 3/4" Ground, GS, 10'
PNDS110 PNDS: 1" Ground, GS, 10'
PNDS3410SS PNDS: 3/4" Ground, SS, 10'
PNDS110SS PNDS: 1" Ground, SS, 10'


Note: Standard length is 10 feet. Additional lengths available upon request.

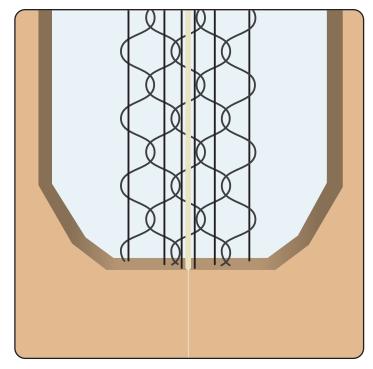









UOTE	Company: Name: Address: City: State/ZIP: Phone:	QTY: Material/Gauge: Length:	PO Number: Job/Project: Notes:
	eMail:		

