



SFC: Short Flange Casing

- Custom Sizes Available, Contact Customer Service For Details
- Available With 1/8" Weep Holes or No Holes
- Available Curved Upon Request
- Available in Aluminum (A), Copper (C), Galvanized Steel (GS), Bonderized (BN), Galvalume® (GVM), Stainless Steel (SS) or Zinc (Z)

This is the most frequently used casing bead for terminating drywall and plaster.

Most Common Sizes

X Sizes: 3/8", 1/2", 3/4", 7/8", 1", 1 1/8", 1 1/4", 1 3/8"

or 1 1/2"

Y Sizes: 1 1/4", 1 1/2", 2" or 2 1/2"

Length: 120"

Materials And Finishes:

Details: stpro.us/MET

Aluminum (A), Copper (C), Galvanized Steel (GS), Bonderized (BN), Galvalume® (GVM), Stainless Steel (SS) or Zinc (Z)

` '


ASTM Codes:

Details: stpro.us/ASTM

All Accessories are fabricated from prime galvanized steel G90 zinc coating by the hot dipped method, conforming to steel and coating specification ASTM A-653/A-653M or zinc alloy meeting ASTM B-69. Stainless Steel A480/A480M A580M (Stainless Steel) For installation and placement instructions refer to ASTM C1063, C841 and C926.

Most Common Part Numbers:


SFC034 114	SFC: X=3/4, Y=1 1/4, GS, 10'
SFC034W114	SFC: X=3/4, 1/8 Weep, Y=1 1/4, GS, 10'
SFC078 114	SFC: X=7/8, Y=1 1/4, GS, 10'
SFC078 114SS	SFC: X=7/8, Y=1 1/4, SS, 10'
SFC078 114Z	SFC: X=7/8, Y=1 1/4, Z, 10'
SFC078 200	SFC: X=7/8, Y=2, GS, 10'
SFC100 114	SFC: X=1, Y=1 1/4, GS, 10'
SFC118 114	SFC: X=1 1/8, Y=1 1/4, GS, 10'

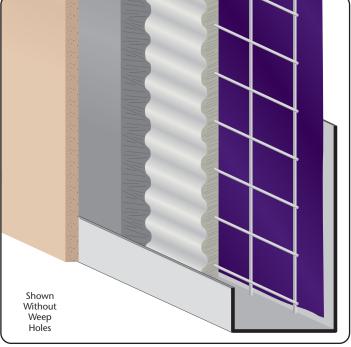









QUOTE	Company: Name: Address: City:	QTY:	PO Number: Job/Project: Notes:
	State/ZIP:Phone:eMail:	Length: Weep Holes: ☐ None ☐ 1/8"	

