




**1-87-STOCKTON**  
 FAX: (702) 651-0948  
 office@stocktonproducts.com  
 Facebook.com/stocktonproducts  
 www.StocktonProducts.com

## ECS: Expansion Channel Screed (#40) - 2 pc.







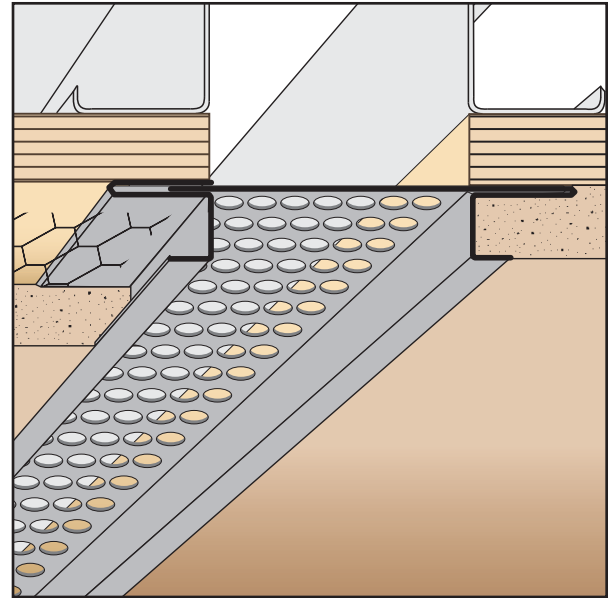



- Available With 1/8", 1/4" Vent Holes or No Vent
- Available in Copper, Galvanized Steel, Zinc, Stainless Steel or Aluminum

Adjustable version of our Plaster Channel Screed that permits movement in a double stud condition. Can be vented for air flow.


**Note:** Aluminum is not available with 1/8" vent holes.



**KEY**

-  PLASTER/STUCCO
-  CONCRETE
-  PLYWOOD
-  WOOD
-  FOAM
-  WATERPROOF BARRIER
-  WALL SHEATHING
-  DRYWALL
-  DRYWALL MUD
-  FIBER CEMENT

Length	X Size	Y Size
10'	3/8"	1/2"
	1/2"	3/4"
	5/8"	1"
	3/4"	1 1/2"
	7/8"	2"
	1"	2 1/2"
1 3/8"	3"	
	3 1/2"	

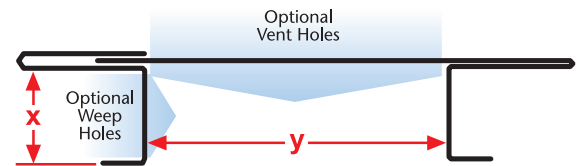

### Materials:

- Copper (16oz. (24-266A))
- Galvanized Steel (26-gauge G90)
- Zinc (.020 #190 Pure Zinc Alloy)
- Stainless Steel (304#2 & 304#4)
- Aluminum (5052)

**Note:** Standard length is 10 feet.  
 Additional lengths available upon request.

### ASTM Codes:

- A580M (Stainless Steel)
- A653/A653M (Galvanized Coating)
- A924 (Galvanized Coating)
- B152/B152M (Copper)
- B209 (Aluminum Sheet)
- B221-14 (Aluminum)
- B69 (Zinc)
- C1047 (Drywall)
- C1063 (Accessories)
- C841 (Interior Furring and Lathing)

