











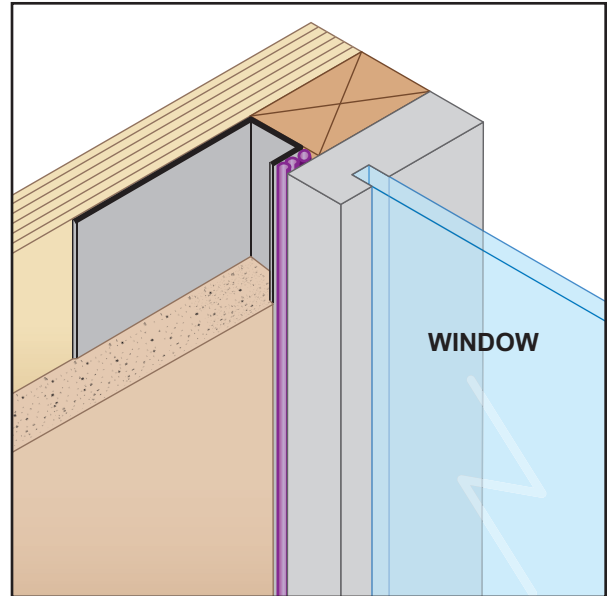

# JCB: J Caulking Bead

- Superior™ Moisture Protection
- Available in Copper, Galvanized Steel, Zinc, Stainless Steel or Aluminum


Standard plaster stop/casing bead for terminating stucco with an extended return key for caulking. Matching factory miter-cut, solid-soldered inside and outside corners are available, giving you moisture management confidence throughout the entire installation.



**KEY**

-  PLASTER/STUCCO
-  CONCRETE
-  PLYWOOD
-  WOOD
-  FOAM
-  WATERPROOF BARRIER
-  WALL SHEATHING
-  DRYWALL
-  DRYWALL MUD
-  FIBER CEMENT

Length	X Size	Y Size	Z Size
10'	3/8"	1 1/2"	1/2"
	1/2"	2"	5/8"
	3/4"	2 1/2"	3/4"
	7/8"	3"	1"
	1 1/8"	3 1/2"	
	1 1/4"	4"	
	1 3/8"	5"	



### Materials:

- Copper (16oz. (24-266A))
- Galvanized Steel (26-gauge G90)
- Zinc (.020 #190 Pure Zinc Alloy)
- Stainless Steel (304#2 & 304#4)
- Aluminum (5052)

**Note:** Standard length is 10 feet.  
 Additional lengths available upon request.

### ASTM Codes:

- A580M (Stainless Steel)
- A653/A653M (Galvanized Coating)
- A924 (Galvanized Coating)
- B152/B152M (Copper)
- B209 (Aluminum Sheet)
- B221-14 (Aluminum)
- B69 (Zinc)
- C1047 (Drywall)
- C1063 (Accessories)
- C841 (Interior Furring and Lathing)

