



PRODUCTS™

1-87-STOCKTON

FAX: (702) 651-0948

office@stocktonproducts.com

FaceBook.com/stocktonproducts


www.StocktonProducts.com

OCSF34: 3/4 One-Coat Short Flange


This multi-purpose piece is used for both exterior insulation "Hard Coat" and "One-Coat" systems. It is especially useful around doors, windows, and as a "Return" or "Stop". Length of flange is 3/4" flange with longer 3" back flange.

Galvanized: 10OCSF34 (3/4")

Stainless Steel: 10SSOCSF34 (3/4")

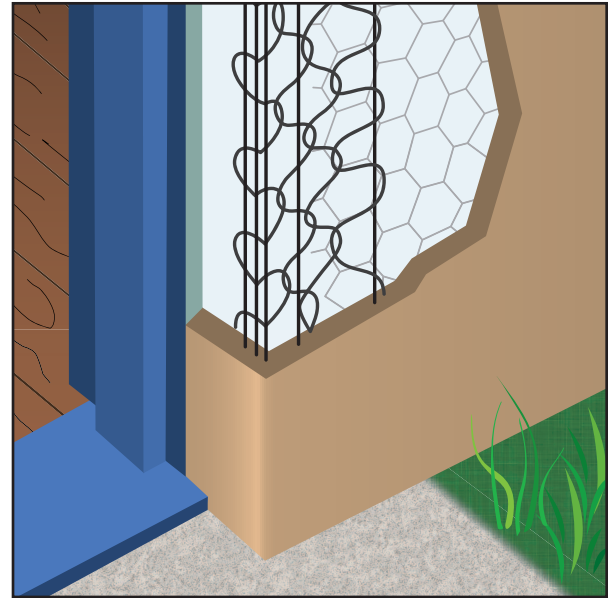

| Length | Feet Per Carton |
|--------|-----------------|
| 10 Ft. | 400 Ft./Ctn. |

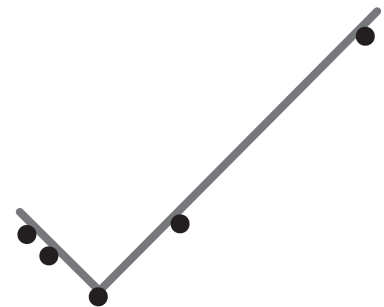

Materials:

- Galvanized (17.5 Gauge Wire)
G-60 Coating
- Stainless Steel (17.5 Gauge Wire)
316L Stainless 18% Chromium

Note: Standard length is 10 feet.
Additional lengths available upon request.

ASTM Codes:

- A580/A580M (Stainless Steel)
- A641/A641M (Galvanized Wire)
- A653/A653M (Galvanized Coating)
- A924 (Galvanized Steel)
- C1047 (Drywall)
- C1063 (Accessories)
- C1063 (Accessories)
- C841 (Interior Furring & Lathing)

©2016 Stockton Products. All rights reserved worldwide. CornerAid®, WeepAid®, Pozalite®, ArchAid®, StockAid®, EmberStop®, BugStop®, SolidGround®, Tru-Corner® and Superior Moisture Protection™ are all trademarks of Stockton Products™.

