


# OEC: Offset Expansion Channel Screed









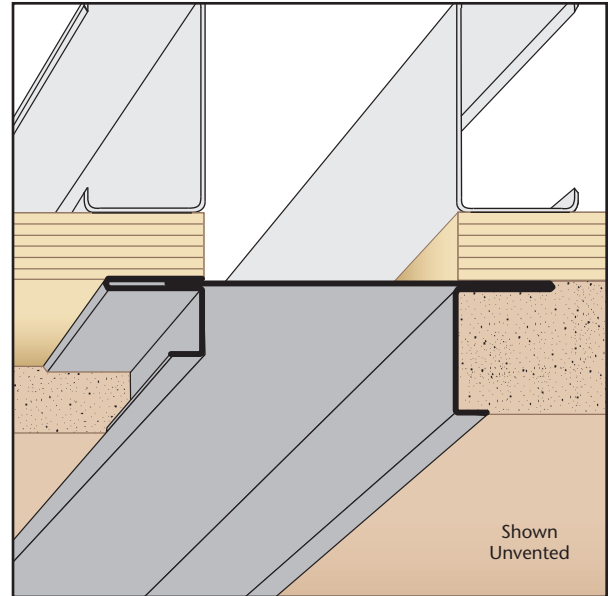

- Available With 1/8", 1/4" Vent Holes or No Holes
- Available in Copper, Galvanized Steel, Zinc, Stainless Steel or Aluminum

Adjustable version of our Offset Plaster Channel Screed that permits movement in a double stud condition or at a floor line.


**Note:** Aluminum is not available with 1/8" vent holes.



**KEY**

-  PLASTER/STUCCO
-  CONCRETE
-  PLYWOOD
-  WOOD
-  FOAM
-  WATERPROOF BARRIER
-  WALL SHEATHING
-  DRYWALL
-  DRYWALL MUD
-  FIBER CEMENT

| Length | X Size | Y Size | Z Size |
|--------|--------|--------|--------|
| 10'    | 3/8"   | 3/4"   | 1/2"   |
|        | 1/2"   | 1"     | 3/4"   |
|        | 3/4"   | 1 1/2" | 7/8"   |
|        | 7/8"   | 2"     | 1"     |
|        | 1"     | 2 1/2" | 1 1/4" |
|        | 1 3/8" | 3"     | 1 3/8" |
|        |        |        | 1 3/4" |
|        |        |        | 2"     |

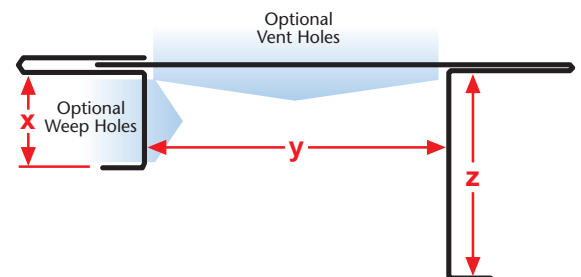

## Materials:

- Copper (16oz. (24-266A))
- Galvanized Steel (26-gauge G90)
- Zinc (.020 #190 Pure Zinc Alloy)
- Stainless Steel (304#2 & 304#4)
- Aluminum (5052)

**Note:** Standard length is 10 feet.  
 Additional lengths available upon request.

## ASTM Codes:

- A580M (Stainless Steel)
- A653/A653M (Galvanized Coating)
- A924 (Galvanized Coating)
- B152/B152M (Copper)
- B209 (Aluminum Sheet)
- B221-14 (Aluminum)
- B69 (Zinc)
- C1047 (Drywall)
- C1063 (Accessories)
- C841 (Interior Furring and Lathing)

