



PRODUCTS™

1-87-STOCKTON

FAX: (702) 651-0948

office@stocktonproducts.com

FaceBook.com/stocktonproducts

www.StocktonProducts.com


## PNSF: Plastic Nose Short Flange

This is the standard short flange with a high impact, non-rusting plastic nose and is excellent for heavy rain, high humidity and salt air climates. It is also useful to the fireproofing industry for boxed and contoured "I" beams.

Shaped for exterior corners on doors, windows and panel systems where a short flange or stop is needed. It offers one Standard 2 3/8" leg and one short 1 1/2" leg. Available in stainless steel to be used with absolute confidence in harsh environments. Recommended for use with acrylic finishes.

Galvanized: 10PNSF

Stainless Steel: 10SSPNSF

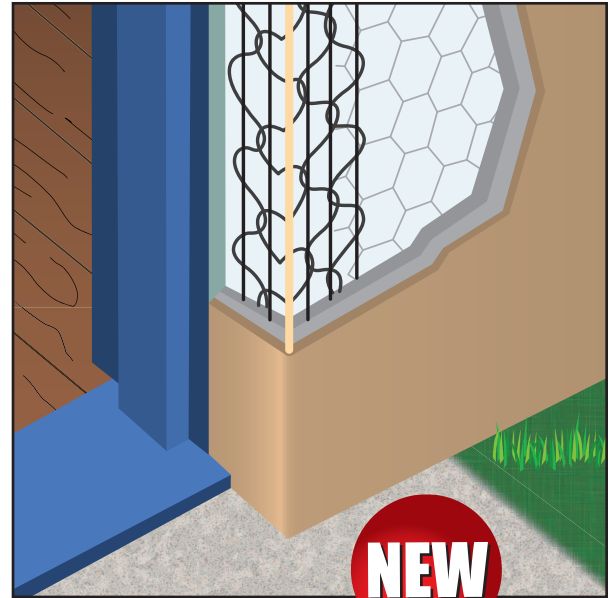

Length	Feet Per Carton
10 Ft.	300 Ft./Ctn.



### Materials:

- Galvanized (17.5 Gauge Wire)  
G-60 Coating
- Stainless Steel (17.5 Gauge Wire)  
316L Stainless 18% Chromium

**Note:** Standard length is 10 feet.  
Additional lengths available upon request.

### ASTM Codes:

- A580/A580M (Stainless Steel)
- A641/A641M (Galvanized Wire)
- A653/A653M (Galvanized Coating)
- A924 (Galvanized Steel)
- C1047 (Drywall)
- C1063 (Accessories)
- C1063 (Accessories)
- C841 (Interior Furring & Lathing)

©2016 Stockton Products. All rights reserved worldwide. CornerAid®, WeepAid®, Pozalite®, ArchAid®, StockAid®, EmberStop®, BugStop®, SolidGround®, Tru-Corner® and Superior Moisture Protection™ are all trademarks of Stockton Products™.

