



PRODUCTS™

1-87-STOCKTON

FAX: (702) 651-0948



office@stocktonproducts.com

FaceBook.com/stocktonproducts

www.StocktonProducts.com


# XPM: X Plaster Molding

Creates a decorative inverted corner reveal detail for conventional 3-coat stucco at fascia/soffit conditions and around recessed entryways and doors. Can also be used to trim off the tops of pony walls and used as a drip edge on a fascia/soffit condition.

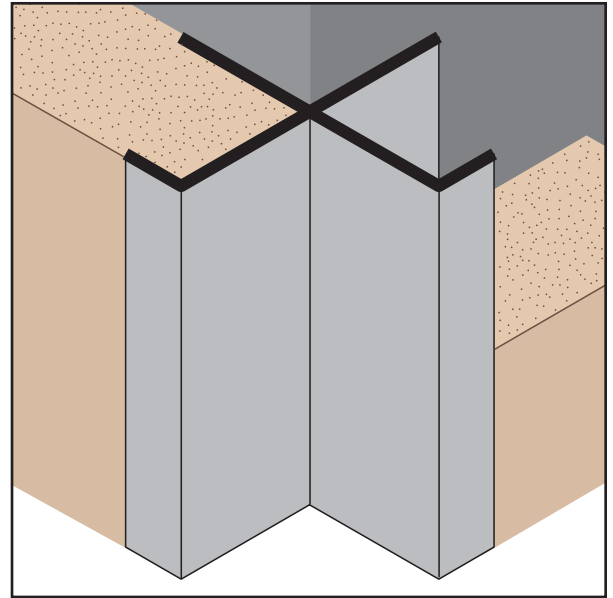

KEY	
	PLASTER/STUCCO
	CONCRETE
	PLYWOOD
	WOOD
	FOAM
	WATERPROOF BARRIER
	WALL SHEATHING
	DRYWALL
	DRYWALL MUD
	FIBER CEMENT

Length	X Size	Y Size
10'	3/4"	3/4"

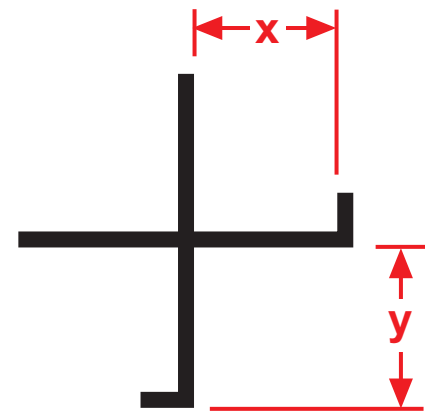

### Materials:

- Aluminum Alloy (6063 T-5)

**Note:** Standard length is 10 feet. Additional lengths available upon request.

### ASTM Codes:

- B136 (Anodize Coating)
- B244 (Anodize Coating)
- C1063 (Accessories)
- D4214 (Paint Films)
- B221-14 (Aluminum)

