



PRODUCTS™

1-87-STOCKTON

FAX: (702) 651-0948

office@stocktonproducts.com



Facebook.com/stocktonproducts

www.StocktonProducts.com







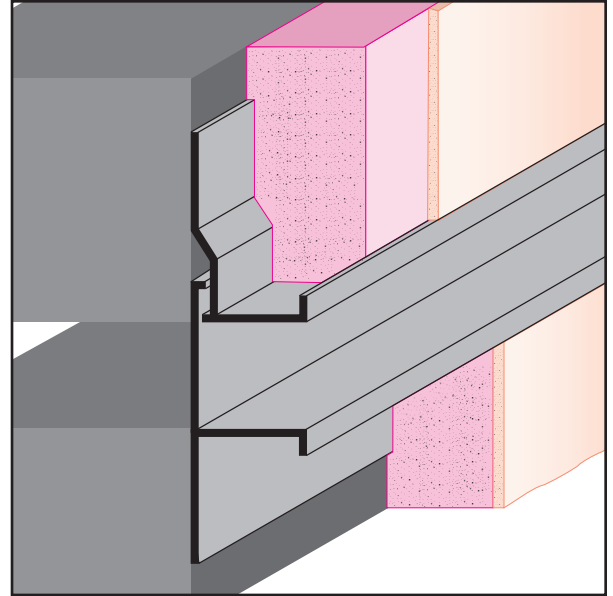



DCS 50-2: Drywall Channel Screed 50 - 2 pc.

- Available With 1/8" x 1" Vent Slots or No Vents


A two-piece version of the DCS series molding that provides 1/4" +/- movement where a "true" expansion joint is required. Used for stucco over block or when only a 1/2" depth is required.



KEY

-  PLASTER/STUCCO
-  CONCRETE
-  PLYWOOD
-  WOOD
-  FOAM
-  WATERPROOF BARRIER
-  WALL SHEATHING
-  DRYWALL
-  DRYWALL MUD
-  FIBER CEMENT

| Length | X Size | Y Size |
|--------|--------|--------|
| 10' | 1/2" | 1/4" |
| | 3/4" | 1/2" |
| | | 3/4" |
| | | 1" |
| | | 1 1/2" |
| | | 2" |

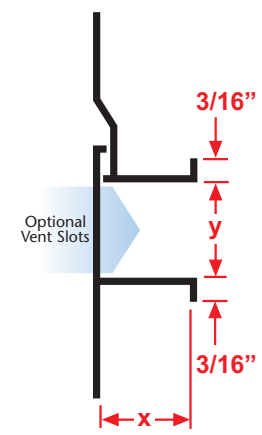

Materials:

- Aluminum Alloy (6063 T-5)

Note: Standard length is 10 feet. Additional lengths available upon request.

ASTM Codes:

- B136 (Anodize Coating)
- B244 (Anodize Coating)
- C1063 (Accessories)
- D4214 (Paint Films)
- B221-14 (Aluminum)

