




1-87-STOCKTON
 FAX: (702) 651-0948
 office@stocktonproducts.com
 FaceBook.com/stocktonproducts
 www.StocktonProducts.com

DVZCJ: #15 Double V Zinc Expanded Flange Control Joint

- Available With 1/2" and 3/4" Ground Depth
 - Made of Zinc (25 Gauge Thickness)
- A pure zinc #15 expanded flange control joint for harsh environments where maximum anti-corrosive protection is desired. Available with 1/2" and 3/4" ground depths for a variety of installation options.


Note: Additional ground depths available on special order. Please call customer service for details.

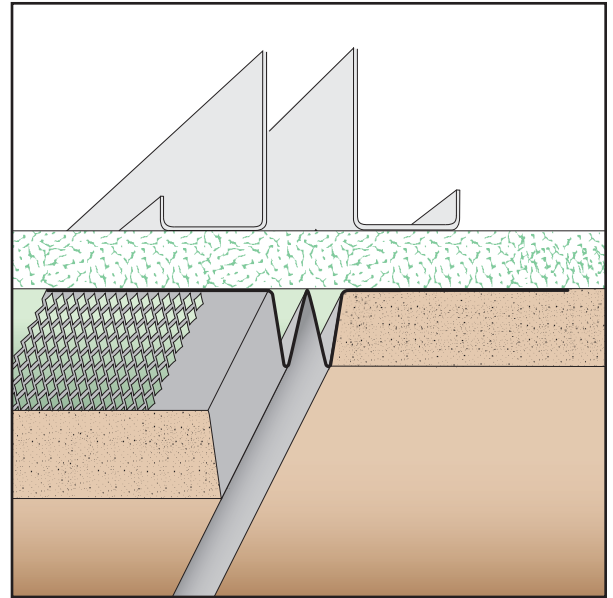

KEY

- PLASTER/STUCCO
- CONCRETE
- PLYWOOD
- WOOD
- FOAM
- WATERPROOF BARRIER
- WALL SHEATHING
- DRYWALL
- DRYWALL MUD
- FIBER CEMENT

Length	X Size	Y Size
10'	1/2"	1/4"
	3/4"	

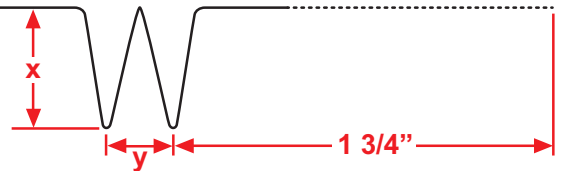

Size And Packaging

Ground	Length	Pieces Per Carton	Wgt. Per Carton	Feet Per Carton
1/2"	10'	24	66 lbs.	240
3/4"	10'	24	68 lbs.	240

*Sold by the carton only.

Materials:

- 25ga. 99.9% Pure Zinc

Note: Standard length is 10 feet.

ASTM Codes:

- B29 (Zinc)
- B69 (Zinc)

