








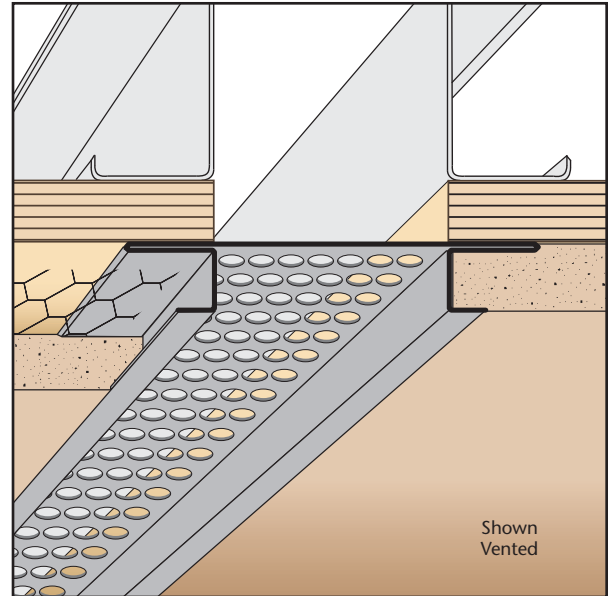



PCS: Plaster Channel Screed

- Available With 1/8", 1/4" Vent Holes or No Vent
- Available in Copper, Galvanized Steel, Zinc, Stainless Steel or Aluminum



Channel screed style reveal that provides decorative shadow lines and accent stripes in an exterior finish. Has return keys for screeding of stucco. Can also be ordered vented for a perimeter air flow application.

Note: For Y Sizes over 2", use extruded aluminum or ECS.



| KEY | |
|---|--------------------|
|  | PLASTER/STUCCO |
|  | CONCRETE |
|  | PLYWOOD |
|  | WOOD |
|  | FOAM |
|  | WATERPROOF BARRIER |
|  | WALL SHEATHING |
|  | DRYWALL |
|  | DRYWALL MUD |
|  | FIBER CEMENT |

| Length | X Size | Y Size |
|--------|--------|--------|
| 10' | 3/8" | 1/2" |
| | 1/2" | 3/4" |
| | 5/8" | 1" |
| | 3/4" | 1 1/2" |
| | 7/8" | 2" |
| | 1" | |
| 1 3/8" | | |

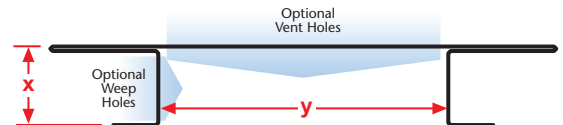

Materials:

- Copper (24ga. - 0.0216" - 16oz)
- Galvanized Steel (26ga. - 0.0217" - G60*)
- Zinc (24ga. - 0.0200" - #190)
- Stainless Steel (26ga. - 0.0187" - SAE 304)
 - #2B (Dull Finish)
 - #4 (Brushed Finish)
 - #8 (Mirror Finish)
- Aluminum (22ga. - 0.0253" - 5052 H32)

Note: Standard length is 10 feet. Additional lengths available upon request.

Note: *G90 available upon request

ASTM Codes:

- A580M (Stainless Steel)
- A653/A653M (Galvanized Coating)
- A924 (Galvanized Coating)
- B152/B152M (Copper)
- B209 (Aluminum Sheet)
- B69 (Zinc)
- C1047 (Drywall)
- C1063 (Accessories)
- C841 (Interior Furring and Lathing)

