










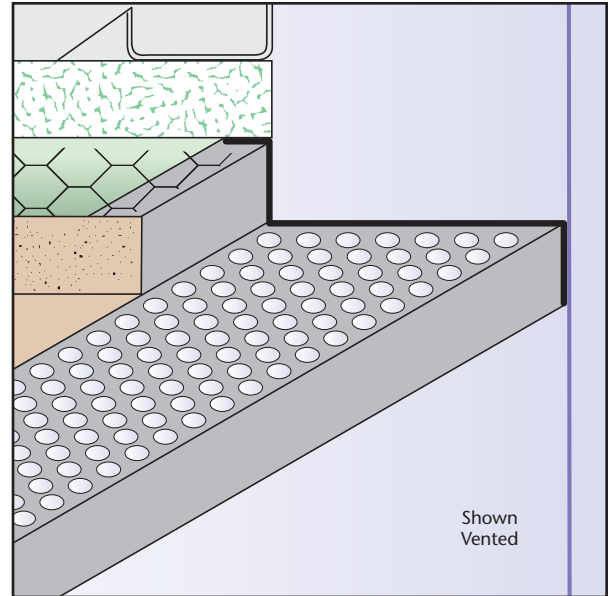

# SSM: Step Separation Mold

- Available With 1/8", 1/4" Vent Holes or No Holes
- Available in Copper, Galvanized Steel, Zinc, Stainless Steel or Aluminum


A versatile molding used primarily to separate either plaster or drywall from other materials.



**KEY**

-  PLASTER/STUCCO
-  CONCRETE
-  PLYWOOD
-  WOOD
-  FOAM
-  WATERPROOF BARRIER
-  WALL SHEATHING
-  DRYWALL
-  DRYWALL MUD
-  FIBER CEMENT

| Length | X Size | Y Size |
|--------|--------|--------|
| 10'    | 1/2"   | 3/4"   |
|        | 5/8"   | 1"     |
|        | 3/4"   | 1 1/2" |
|        | 7/8"   | 2"     |
|        | 1"     | 2 1/2" |
|        |        | 3"     |
|        |        | 3 1/2" |
|        |        | 4"     |
|        | 4 1/2" |        |

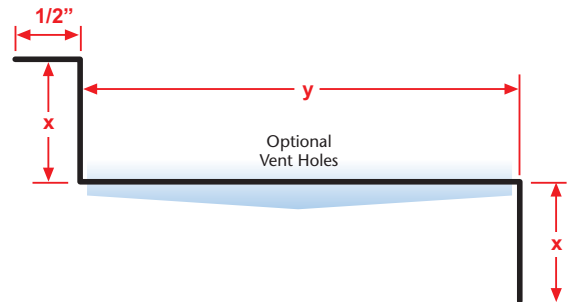

### Materials:

- Copper (24ga. - 0.0216" - 16oz)
- Galvanized Steel (26ga. - 0.0217" - G60\*)
- Zinc (24ga. - 0.0200" - #190)
- Stainless Steel (26ga. - 0.0187" - SAE 304)
  - #2B (Dull Finish)
  - #4 (Brushed Finish)
  - #8 (Mirror Finish)
- Aluminum (22ga. - 0.0253" - 5052 H32)

**Note:** Standard length is 10 feet.  
 Additional lengths available upon request.  
**Note:** \*G90 available upon request

### ASTM Codes:

- A580M (Stainless Steel)
- A653/A653M (Galvanized Coating)
- A924 (Galvanized Coating)
- B152/B152M (Copper)
- B209 (Aluminum Sheet)
- B69 (Zinc)
- C1047 (Drywall)
- C1063 (Accessories)
- C841 (Interior Furring and Lathing)

