



DWR: Drywall Reveal

- Custom Sizes Available, Contact Customer Service For Details
- Available With 1/8", 1/4" Vent Holes or No Vent
- Available Curved Upon Request
- Available in Aluminum (A), Copper (C), Jet Kote (JTC), Bonderized (BN), Galvalume[®] (GVM), Stainless Steel (SS) or Zinc (Z)

Creates a decorative reveal in the drywall. The molding is attached after the drywall is installed, minimizing labor. Can be vented to permit air flow. Includes key holes for drywall mud adhesion.

Most Common Sizes

X Sizes: 1/2" or 5/8"

Y Sizes: 1 1/2", 2", 2 1/2", 3", 3 1/2", 4" or 4 1/2"

Length: 120"

Materials And Finishes:

Details: stpro.us/MET

Aluminum (A), Copper (C), Jet Kote (JTC), Bonderized

(BN), Galvalume® (GVM), Stainless Steel (SS)

or Zinc (Z)


ASTM Codes:

Details: stpro.us/ASTM


All Accessories are fabricated from prime galvanized steel G90 zinc coating by the hot dipped method, conforming to steel and coating specification ASTM A-653/A-653M or zinc alloy meeting ASTM B-69. Stainless Steel A480/A480M A580M (Stainless Steel) For installation and placement instructions refer to ASTM C1063, C841 and C926.

Most Common Part Numbers:

DWR012V200	DWR: X=1/2, 1/8 Vent, Y=2, GS, 10'
DWR012V300	DWR: X=1/2, 1/8 Vent, Y=3, GS, 10'
DWR012V400J	DWR: X=1/2, 1/4 Vent, Y=4, GS, 10'
DWR058V200	DWR: X=5/8, 1/8 Vent, Y=2, GS, 10'
DWR058V300	DWR: X=5/8, 1/8 Vent, Y=3, GS, 10'
DWR058V300J	DWR: X=5/8, 1/4 Vent, Y=3, GS, 10'
DWR058V600	DWR: X=5/8, 1/8 Vent, Y=6, GS, 10'
DWR258 300A	DWR: X=2 5/8, Y=3, A, 10'

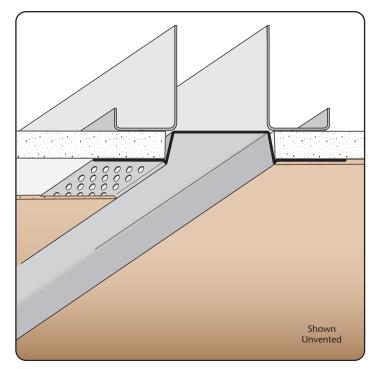



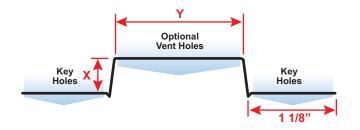

	Company:	QTY:	PO Number:
ш	Name:	Material/Gauge:	Job/Project:
	Address:	X Size:	Notes:
0	City:	Y Size:	
	State/ZIP:	Length:	
0	Phone:	Vent Holes: ☐ None ☐ 1/8" ☐ 1/4"	
	eMail:		

